

**Clavija mural**

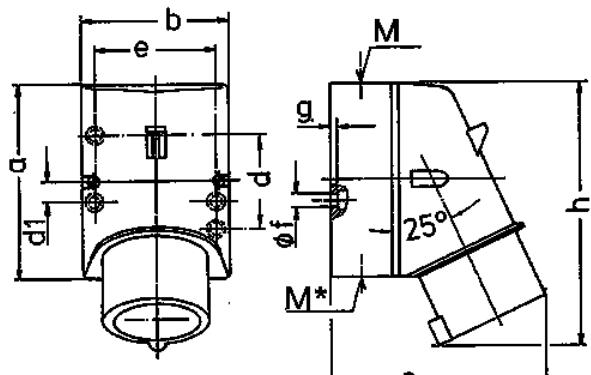
N.º ref. 3230



- Contacto roscado

**Especificaciones técnicas**

Amperios	16 A
Polos	3 p
Voltios	50-500 V
Sentido horario	1 h
Técnica de conexión	bornas de tornillo
Contactos	estándar
Grado de protección	IP 44
Peso	150 g
Marca de verificación	EAC, CQC

**Planos y dimensiones**


Plano 2 MB 32	Amp. Polos	16			32		
		3	4	5	3	4	5
Dim. en mm							
a	87	100	100		128	128	128
b	64	75	75		84	84	84
c	93	106	110		133	133	135
d	40	—	—		—	—	—
d1	—	10,5	10,5		11	11	11
e	50,5	59	59		68	68	68
f	4,5	5	5		5,3	5,3	5,3
g	4	4	4		4	4	4
h	122	133	135		169	169	170
M	20	20	20		32	32	32
M*	15	15	15	1x20 Ø y [max]	18/25	18/25	18/25
Ø y [max]							
Borna para cond. Sección	1	1	1		2,5	2,5	2,5
Transvers. (mm <sup>2</sup> ) min.-max.	—2,5	—2,5	—2,5		—6	—6	—6